


Kedjehjul

*För kedja ISO 083 och 084,
delning 1/2" x 3/16" (12,7 mm)*

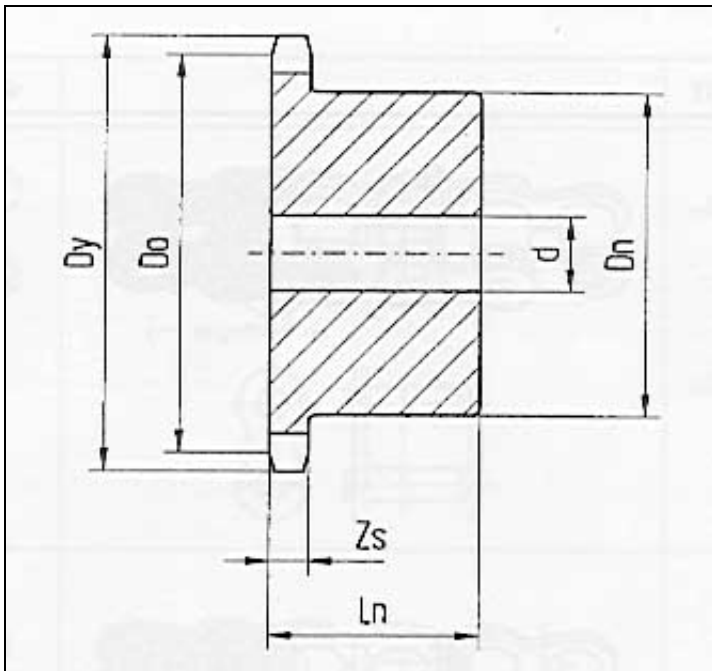

Z	Do mm	Dy mm	d mm	Dn mm	Ln mm	Zs
8	33,18	38,5	21	8	14	4,88
9	37,13	41,5	25	8	14	4,88
10	41,10	46,2	28	8	14	4,88
11	45,07	49,6	31	8	16	4,88
12	49,07	53,9	35	8	16	4,88
13	53,06	58,4	39	8	16	4,88
14	57,07	62,8	43	8	16	4,88
15	61,09	66,8	47	8	16	4,88
16	65,10	70,9	50	10	18	4,88
17	69,11	74,9	50	10	18	4,88
18	73,14	78,9	50	10	18	4,88
19	77,16	82,9	50	10	18	4,88
20	81,19	86,9	50	10	18	4,88
21	85,22	91	60	12	20	4,88

22	89,24	95	60	12	20	4,88
23	93,27	99	60	12	20	4,88
24	97,29	103	60	12	20	4,88
25	101,33	107	60	12	20	4,88
26	105,36	111	70	16	20	4,88
27	109,40	115	70	16	20	4,88
28	113,42	119	70	16	20	4,88
29	117,46	123	70	16	20	4,88
30	121,50	128	70	16	20	4,88
31	125,54	132	70	16	20	4,88
32	129,56	136	70	16	20	4,88
33	133,60	140	70	16	20	4,88
34	137,64	144	70	16	20	4,88
35	141,68	148	70	16	20	4,88
36	145,72	152	70	16	25	4,88
37	149,76	156	70	16	25	4,88
38	153,80	160	70	16	25	4,88
39	157,83	164	70	16	25	4,88
40	161,87	168	70	16	25	4,88

Max axelhål med kilspår SMS 2305 kan generellt fås genom att multiplicera Dn x 0,6.