


Rullkedjor

Gallkedja enligt DIN 8150

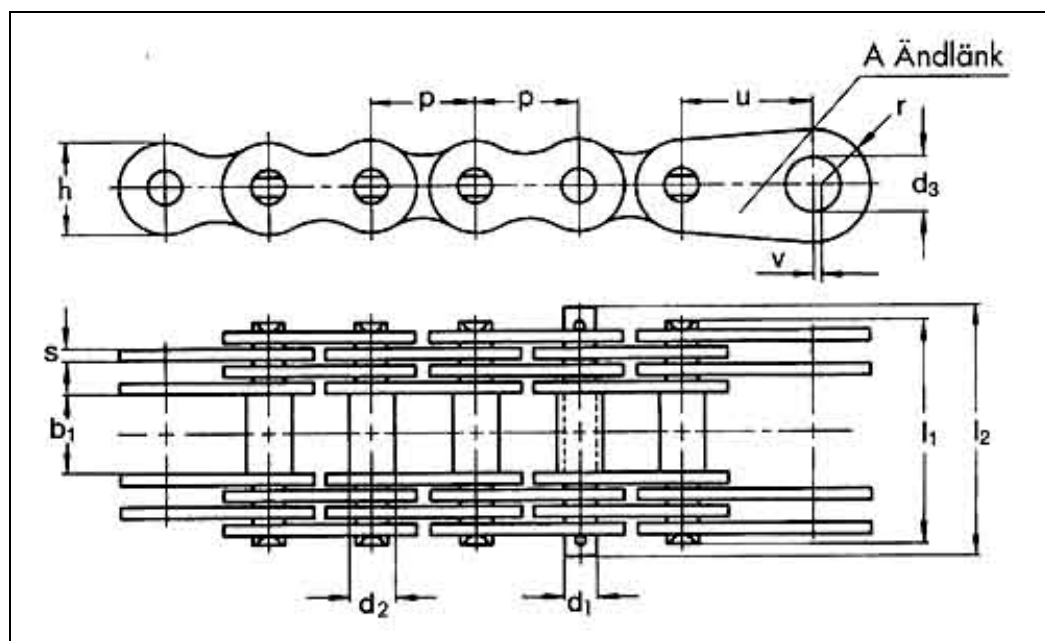

Kedja	Delning P mm	Inv. bredd b_1 mm	Pinne $\text{Æ } d_1$ mm	Pinne $\text{Æ } d_2$ mm	Höjd h mm	Tjock- lek s mm	Bredd över nitar l_1 mm	Bredd över lås l_2 mm	Antal brickor per länk	Ändlänk Hål $\text{Æ } d_3$ mm	Ändlänk Radie r mm	Ändlänk u mm	Ändlänk v mm
305	20	15	8	6	15	2,0	28	33	2	10	10,0	25	2,0
306	25	18	10	8	18	3,0	36	42	2	12	12,5	30	2,5
308	30	20	11	9	20	3,0	51	58	4	14	15,0	40	3,0
310	35	22	12	10	26	3,0	53	61	4	16	17,5	45	3,5
311	40	25	14	12	32	3,0	58	66	4	18	20,0	50	4,0
312	45	30	17	14	35	3,0	63	70	4	22	22,5	55	4,5
313	50	35	22	18	40	4,5	90	97	4	26	25,0	60	5,0
314	55	40	24	21	42	6,0	108	115	4	32	27,5	65	5,5
315	60	45	26	23	46	6,0	114	120	4	36	30,0	70	6,0
317	70	50	32	28	55	6,0	148	157	6	40	35,0	85	7,0

Kopplingsbult



B Ändbult för inner-ändlänk



C Ändbult för yttre-ändlänk



D Nitbult



E Kopplingsbult med hylsa