
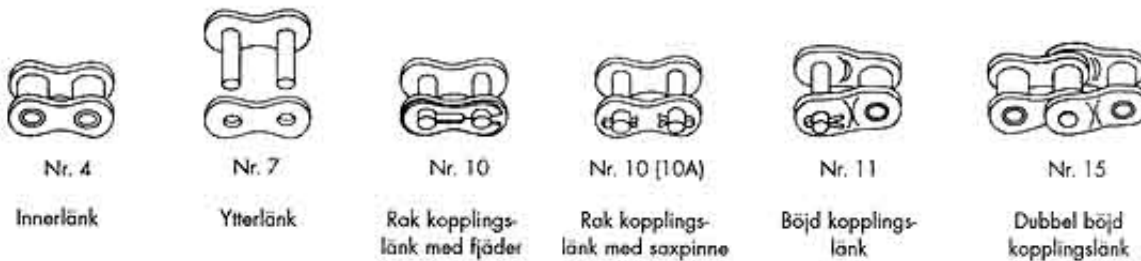


Rullkedjor

Amerikansk standard

Din 8188 (ISO 606-1982 och SMS 2070)

Tvåradig rullkedja

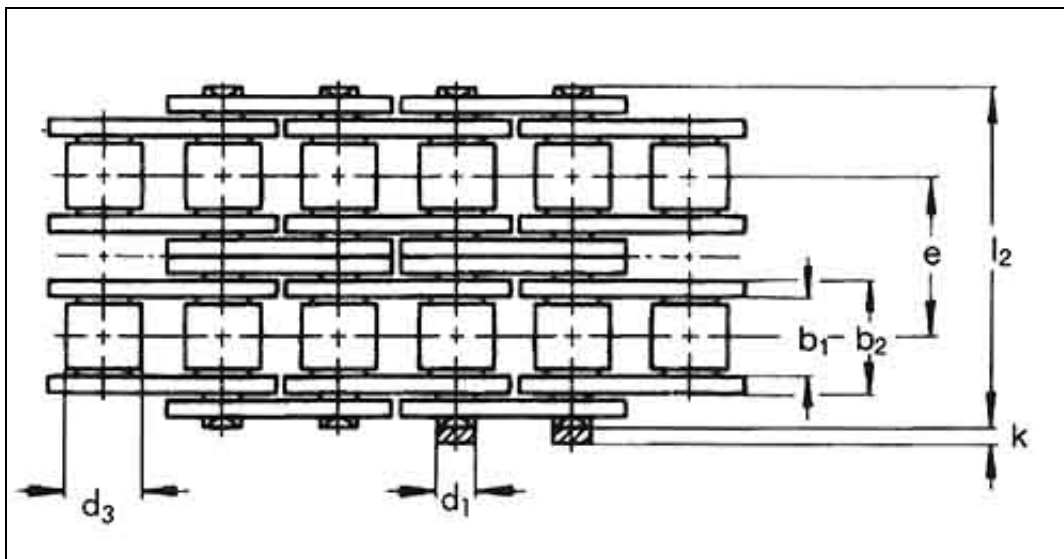

Kedja	Delning P mm	Delning P tum	Inv. bredd b_1 min	Utv. bredd b_2 max	Rulle $\text{Æ } d_3$ max	Pinne $\text{Æ } d_1$ h9	Höjd h max	Lås- sida k max	Bredd över nitar l_2 max	Centrum delning e mm
06C-2	9,52	3/8	4,68	7,47	5,08	3,58	9,00	3,30	23,40	10,13
08A-2	12,70	1/2	7,85	11,15	7,95	3,96	12,00	3,90	32,30	14,38
10A-2	15,87	5/8	9,40	13,80	10,16	5,08	15,00	4,10	39,90	18,11
12A-2	19,05	3/4	12,57	17,70	11,91	5,94	18,00	4,60	49,80	22,78
16A-2	25,40	1	15,75	22,50	15,88	7,92	24,10	5,40	62,70	29,29
20A-2	31,75	1 1/4	18,90	27,40	19,05	9,53	30,10	6,10	77,00	35,76

24A-2	38,10	1 1/2	25,22	35,30	22,23	11,10	36,20	6,60	96,30	45,44
28A-2	44,45	1 3/4	25,22	37,00	25,40	12,70	42,20	7,40	103,00	48,87
32A-2	50,80	2	31,55	45,00	28,58	14,27	48,20	7,90	124,00	58,55
40A-2	63,50	2 1/2	37,85	54,70	39,68	19,84	60,30	10,00	151,00	71,55