


Rullkedjor

Ej standard

enligt DIN 8189

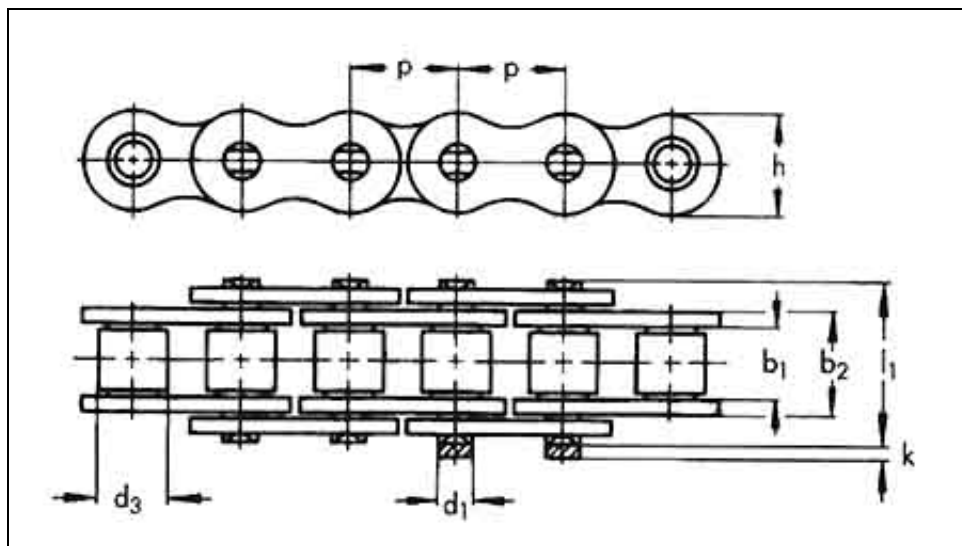

Kedja	Delning P mm	Delning P tum	Inv. bredd b ₁ min	Utv. bredd b ₂ max	Rulle Æ d ₃ max	Pinne Æ d ₁ h ₉	Höjd h max	Lås- sida k max	Bredd över nitar l ₁ max
455TL	9,52	3/8	5,72	8,53	6,35	3,28	9,00	3,30	13,50
18	12,70	1/2	4,88	9,30	7,75	4,18	11,20	1,50	14,40
460	12,70	1/2	5,21	8,70	8,51	4,45	11,80	3,90	15,00
428	12,70	1/2	7,94	11,30	8,51	4,45	12,20	3,90	17,00
515	19,05	3/4	13,50	19,70	12,07	5,72	16,20	4,60	28,60
517	19,05	3/4	11,68	17,00	12,07	6,10	18,10	3,60	24,90
540	25,40	1	12,70	19,00	12,70	7,00	20,50	5,40	27,20
546b	25,40	1	12,70	20,00	14,00	7,50	22,50	5,40	30,00
547	25,40	1	12,70	21,07	15,88	8,28	21,00	5,40	30,90
577	35,00	-	19,60	27,00	19,05	10,19	26,00	6,10	40,00