


Rullkedjor

Elevator-Lantbrukskedjor

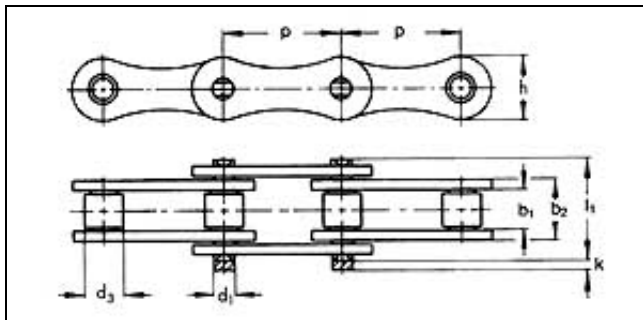

Kedja	Delning P mm	Inv. bredd b ₁ min	Utv. bredd b ₂ max	Rulle Æ d ₃ max	Pinne Æ d ₁ h ₉	Höjd h max	Lås- sida k max	Bredd över nitar l ₁ max
S32	29,21	15,88	20,19	11,43	4,47	13,50	3,90	26,70
S42	34,93	19,05	25,40	14,27	7,01	19,80	5,00	34,30
S52	38,10	22,23	28,58	15,24	5,74	17,30	5,00	38,10
6132	38,40	19,05	25,40	15,88	7,01	17,30	5,00	33,50
S45	41,40	22,23	28,58	15,24	5,74	17,30	5,00	38,10
6142	41,40	22,23	28,58	17,78	8,27	22,30	5,00	38,50
S55	41,40	22,23	28,58	17,78	5,74	17,30	5,00	38,10
6144	41,50	20,70	26,90	15,90	9,05	26,30	5,00	38,10
S62	41,91	25,40	31,80	19,05	5,74	17,30	5,00	40,60
S77	58,34	22,23	31,17	18,26	8,92	26,20	5,70	43,90
S88	66,27	28,58	37,52	22,86	8,92	26,20	5,70	50,80